


# rond 2.0 retrofit/easyfit/backfit socket type F

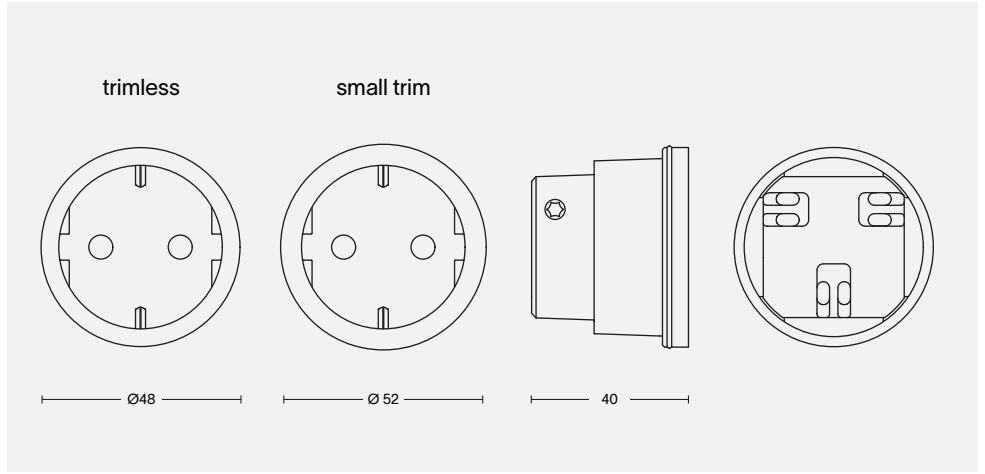

## socket specs

application	16A / 250V	
flush-mounting depth	40 mm	
wire stripping length	13.8 mm	
wire capacity	up to 4 x 2.5 mm <sup>2</sup> per terminal	
wire fixation	screw terminals (TX8)	
ambient temperature	-5 till +40°C	
IP, IK rating	IP21-D	IK06
marking	CE	

## accessories

### installation

8800 - 2011	retrofit plaster ring
8800 - 2013	easyfit plaster box - single
8800 - 2014	easyfit plaster box - double
8800 - 2016	backfit holder
8800 - 2010	removal tool

## order number

	trimless		small trim	
	black cup	white cup	black cup	white cup
cover ring				
basic black	8888 - 9020	-	8888 - 9052	-
basic white	-	8888 - 9021	-	8888 - 9053
black ano	8888 - 9022	-	8888 - 9054	-
white alu	-	8888 - 9023	-	8888 - 9055
brushed nickel	8888 - 9030	8888 - 9024	8888 - 9062	8888 - 9056
brushed brass	8888 - 9031	8888 - 9025	8888 - 9063	8888 - 9057
light bronze	8888 - 9032	8888 - 9026	8888 - 9064	8888 - 9058
dark bronze	8888 - 9033	8888 - 9027	8888 - 9065	8888 - 9059
canon de fusil light	8888 - 9034	8888 - 9028	8888 - 9066	8888 - 9060
canon de fusil dark	8888 - 9035	8888 - 9029	8888 - 9067	8888 - 9061